



KONICA MINOLTA

COLOR READER CR-20

Simple operation shows colorimetric values for samples in various forms, from solids to powders, pastes, etc. in a instant.

**Simple basic operation. Just three steps:
Switch on → Do white calibration → Measure samples**

Lightweight and compact!

Can display results in any of eight color spaces and colorimetric indexes!



Main features

1 Display data in a variety of color spaces and colorimetric indexes

You can select one color space or color index for the measurement data among the eight color spaces and colorimetric indexes available: L*a*b*, L*C*h, Yxy, Munsell (D65), WI (CIE/ASTM E 313-96), Tint (CIE/ASTM E 313-96), YI (ASTM E 313-96).

2 Averaging function

If sample color is uneven, you can measure several points and then obtain the average result by pressing the Average button.

3 Data Memory

Using the PC application stored in the CR-20, you can set the instrument to store data internally. (Memory capacity: 1,000 data)



Other features

1 A protective glass

The CR-20's tip has a protective glass plate, so you can measure all kinds of samples such as powders, pastes, and wet objects, directly.

2 Printer

By connecting a printer to the CR-20, you can print out measured data.

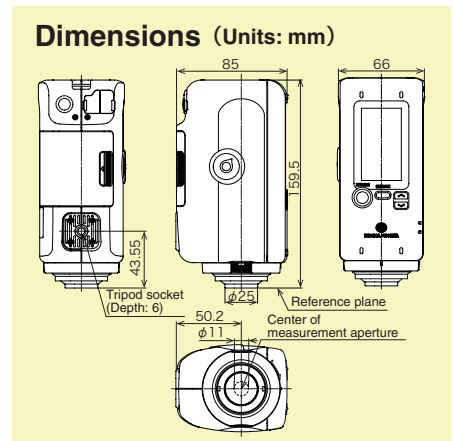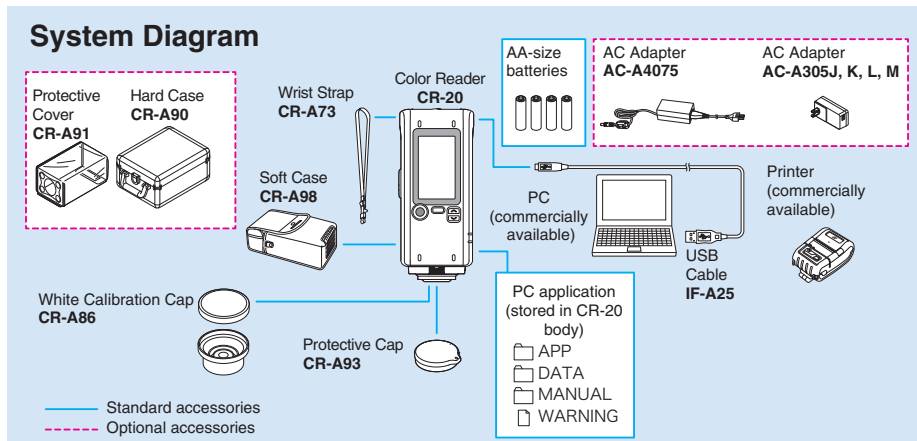

Main Specifications

Model	Color Reader CR-20
Illumination/viewing system	8° : de (8°illumination angle/diffuse viewing: specular component excluded) (conforms to DIN 5033 Teil 7, JIS Z 8722 condition d, ISO 7724/1, CIE No. 15, ASTM E 1164)
Detector	Silicon photocells (6 pcs.)
Light source	Pulsed xenon lamps
Measurement time	Approx. 1 sec.
Battery performance	Approx. 2,000 measurement at 10-sec. intervals when using alkaline-manganese batteries
Measurement area	Approx. : ø8 mm
Repeatability	Standard deviation within ΔE*ab 0.1 (when a white calibration plate is measured 30 times at 10-second intervals)
Display languages	English, Japanese
Interface	USB2.0
Observer	10° Standard Observer
Illuminant	D65
Display data	Colorimetric data, average (up to 999 times)
Color spaces	L*a*b*, L*C*h, Yxy, XYZ, Munsell (D65)
Colorimetric Indexes	WI (CIE/ASTM E 313-96), Tint (CIE/ASTM E 313-96), YI (ASTM E 313-96)
Data memory	Sample data (up to 1,000)
Operation temperature/ humidity range	0 to 40°C, relative humidity 85% or less (at 35°C) with no condensation
Storage temperature/ humidity range	-20 to 40°C, relative humidity 85% or less (at 35°C) with no condensation
Power	4 AA-size alkaline dry batteries or nickel-metal-hydride rechargeable batteries, USB bus power or special AC Adapter
Size (W x H x D)	66 x 159.5 x 85 mm
Weight	420 g (without batteries)

PC system requirement

OS Windows® 10 Pro 32bit, 64bit
Windows® 11 Pro
(English, Japanese)

- The hardware of the computer system to be used must meet or exceed the recommended system requirements for compatible OS being used.
- One USB2.0 port is necessary.

- The specifications and appearance shown herein are subject to change without notice.
- KONICA MINOLTA, the Konica Minolta logo and symbol mark, and "Giving Shape to Ideas" are registered trademarks or trademarks of KONICA MINOLTA, INC.
- Other company names and product names used herein are trademarks or registered trademarks of their respective companies.



SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.
- Be sure to use the specified batteries. Using improper batteries may cause a fire or electric shock.

KONICA MINOLTA, INC.	Osaka, Japan	PHONE: (888)473-2656 (in USA), +1(201)236-4300 (outside USA)	FAX: +1(201)785-2480	E-Mail: service.us@konicaminolta.com
Konica Minolta Sensing Americas, Inc.	New Jersey, U.S.A.	PHONE: +31(0)30 248-1193		E-Mail: info.benelux@seu.konicaminolta.eu
Konica Minolta Sensing Europe B.V.	European HQ/ BENELUX	PHONE: +49(0)89 4357 156 0		E-Mail: info.germany@seu.konicaminolta.eu
	Nieuwegein, Netherlands	PHONE: +33(0)1 80 11 10 70		E-Mail: info.france@seu.konicaminolta.eu
	German Office	PHONE: +44(0)1925 467300		E-Mail: info.uk@seu.konicaminolta.eu
	French Office	PHONE: +39 02849488.00		E-Mail: info.italy@seu.konicaminolta.eu
	UK Office	PHONE: +41(0)43 322-9800		E-Mail: info.switzerland@seu.konicaminolta.eu
	Italian Office	PHONE: +46(0)31 7099464		E-Mail: info.nordic@seu.konicaminolta.eu
	Swiss Office	PHONE: +48(0)71 73452-11		E-Mail: info.poland@seu.konicaminolta.eu
	Nordic Office	PHONE: +86-(0)21-6057-1089		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Polish Office	PHONE: +86-(0)10-8522 1551		E-Mail: hcn_sensing@gcp.konicaminolta.com
Konica Minolta (CHINA) Investment Ltd.	SE Sales Division	PHONE: +86-(0)20-3826 4220		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Beijing Office	PHONE: +86-(0)23-6773 4988		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Guangzhou Office	PHONE: +86(0)23-6794 9512		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Chongqing Office	PHONE: +86(0)532-8079 1871		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Qingdao Office	PHONE: +86(0)27-6885 0586		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Wuhan Office	PHONE: +86(0)755-2868 7535		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Shenzhen Office	PHONE: +86(0)592-7107 399		E-Mail: hcn_sensing@gcp.konicaminolta.com
	Xiamen Office	PHONE: +65 6563-5533		E-Mail: ssg@gcp.konicaminolta.com
Konica Minolta Sensing Singapore Pte. Ltd.	Singapore	PHONE: +82(0)2-523-9726		E-Mail: se.korea@konicaminolta.com
Konica Minolta Sensing Korea Co., Ltd.	Korean HQ	PHONE: +82(0)41-556-9726		E-Mail: se.korea@konicaminolta.com
	Cheonan Office			

Addresses and telephone/fax numbers and e-mail address are subject to change without notice. For the latest contact information, please refer to KONICA MINOLTA Worldwide Offices web page:

<https://konicaminolta.com/instruments/network>