



KONICA MINOLTA

# MULTI GLOSS 268 Plus (20°, 60°, 85°) UNI GLOSS 60Plus (60°)


More comprehensive communication functions for more versatility.

- Maintains data compatibility with previous models while offering high-speed communication via USB and Bluetooth®.

- Approx. 10,000 are possible measurements with one AA (R6) size alkaline battery.


## Large easy to read liquid crystal display. Easy operation with mode scroll wheel.

By operating the mode scroll wheel in accordance with easy-to-understand menu items, you can set a wide array of functions easily.

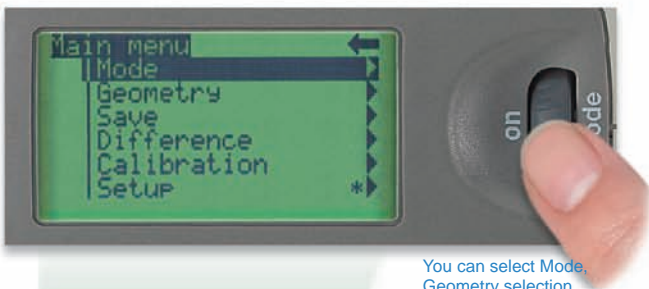


You can select Mode, Geometry selection, Difference, and Calibration from the Main Menu screen.

## Wide array of display modes (in nine languages)



You can measure by selecting Basic mode, Continuous, or Statistics from the Mode screen.



You can select the measurement angle from the Geometry selection screen and display two angles or three angles at the same time.

(MULTI GLOSS 268Plus)


## Wide measurement range that can measure from matte plastic to metal surface with a high gloss finish : 0.0~2,000 GU (in the case of 20°)

## Gloss difference measurement of standard/sample and PASS/FAIL evaluation.

You can perform a pass/fail evaluation by setting the limit value. You can enter the sample name and the standard value name in the measurement result.




Geometric selection selected two angles. (MULTI GLOSS 268)



Standard value name. Geometric selection selected three angles. (MULTI GLOSS 268)

## Autodiagnosis function for calibration

Reduces needed frequency of calibration and improves long-term stability. In addition, if the calibration is required, the message will be displayed.




Calibrating standard



Protective holder

Giving Shape to Ideas

With dedicated Data transfer software (gloss-link), data management such as data transfer to Excel®\* is easy.

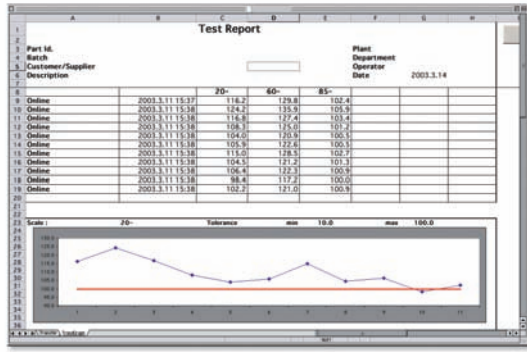


OS Windows®2000/XP/Vista

\* Microsoft Excel® 2000 or higher.  
Windows® and Excel® is a trademark or registered trademark of Microsoft Corporation of America or its subsidiaries.

## Dimensions

Units : mm

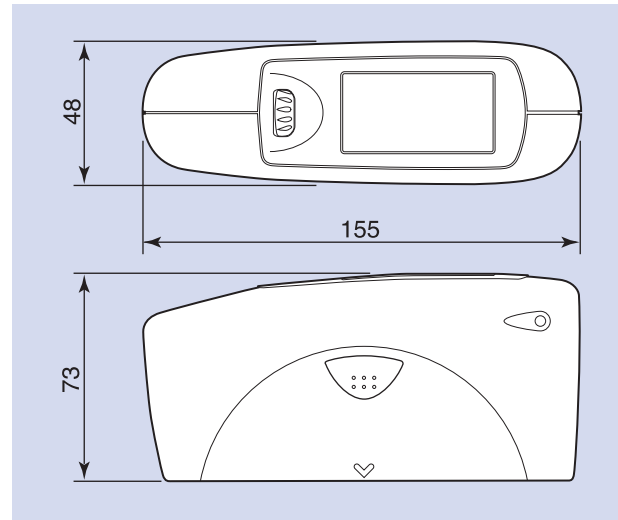

## Specifications

| Model                                 | MULTI GLOSS 268Plus  | UNI GLOSS 60Plus   |
|---------------------------------------|--|--------------------|
| Measurement geometry                  | 20°, 60°, 85°  | 60°                |
| Size of measurement spot              | 20° : 10 X 10 mm<br>60° : 9 X 15 mm<br>85° : 5 X 38 mm   | 60° : 9 X 15 mm    |
| Standard compliance                   | ISO 2813, ISO 7668, ASTM D 523, ASTM D 2457, DIN 67 530, JIS Z 8741, BS 3900, BS 6161(Part 12) |                    |
| Measurement range                     | 20° : 0.0~2,000 GU<br>60° : 0.0~1,000 GU<br>85° : 0.0~160 GU                                   | 60° : 0.0~1,000 GU |
| Resolution                            | 0.0~99.9 GU : 0.1 GU<br>100~2,000 GU : 1 GU  |                    |
| Repeatability                         | 0.0~99.9 GU : 0.2 GU<br>100~2,000 GU : 0.2% of reading   |                    |
| Inter instrument agreement            | 0.0~99.9 GU : 0.5 GU<br>100~2,000 GU : 0.5% of reading   |                    |
| Memory                                | 999 measurements with date and time  |                    |
| Difference measurement                | Memory for 50 standard   |                    |
| Battery performance                   | Approx. 10,000 measurements (when using 1.5 V AA(R6)size alkaline battery)                     |                    |
| Measurement time                      | 0.5 seconds  |                    |
| Auto power off                        | 10~99 seconds selectable   |                    |
| Languages                             | English, Spanish, German, French, Italian, Japanese, Portuguese, Russian, Polish               |                    |
| Measurement mode                      | Normal mode (Sample mode, Statistics, Continuous, Basic mode), Difference mode                 |                    |
| Interface                             | USB2.0; Bluetooth® standard version 2.0*   |                    |
| Operating temperature /humidity range | 15 to 40°C<br>relative humidity 85% or less (at 35°C) with no condensation                     |                    |
| Storage temperature /humidity range   | -10 to 60°C<br>relative humidity 85% or less (at 35°C) with no condensation                    |                    |
| Power supply                          | 1.5 V AA(R6)size alkaline battery, via USB port  |                    |
| Dimensions                            | 155(W) X 73(H) X 48(D) mm  |                    |
| Weight                                | 400 g  |                    |

Note : The specifications described in this document are subject to change without notice.

## Accessories

| Model                | MULTI GLOSS 268Plus  | UNI GLOSS 60Plus                                 |
|----------------------|--|--|
| Standard accessories | Calibration holder TRI (High gloss tile)<br>USB-cable<br>Carrying case<br>Data transfer software (gloss-link)<br>1.5 V AA(R6)size alkaline battery | Calibration holder 60° (High gloss tile)         |
| Optional accessories | Checking standard TRI (3 semi gloss tiles 20, 60, 85°)   | Checking standard 60° (High and semi gloss tile) |
|                      | Checking standard mirror (3 tiles 20, 60, 85°)   |  |

\* Applicable Bluetooth® profile: Serial Port Profile, Output: Bluetooth® Power Class 1 The communication distance may vary depending on the obstacles and radio wave conditions between the devices. Successful wireless communication is not guaranteed with all Bluetooth®-ready equipment.

\*Bluetooth® is a registered trademark of Bluetooth SIG, Inc.

MULTI GLOSS 268 / UNI GLOSS 60 conforms with international specifications ASTM D 523, DIN 67 530, ISO 2813.

ASTM DIN ISO



Certificate No : LRQ 0960094/A  
Registration Date : March 3, 1995

Certificate No : JQA-E-80027  
Registration Date : March 12, 1997

### SAFETY PRECAUTIONS



For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.
- Be sure to use the specified batteries. Using improper batteries may cause a fire or electric shock.

KONICA MINOLTA OPTICS, INC.  
Konica Minolta Sensing Americas, Inc  
Konica Minolta Sensing Europe B.V.

Osaka, Japan  
New Jersey, U.S.A.  
European Headquarter /BENELUX  
German Office  
French Office  
UK Office  
Italian Office  
Swiss Office  
Nordic Office  
Polish Office  
SE Sales Division  
Beijing Branch  
Guangzhou Branch  
Chongqing Office  
Qingdao Office  
Wuhan Office

Phone : 888-473-2656 (in USA), 201-236-4300 (outside USA)  
Nieuwegein, Netherlands  
München, Germany  
Roissy CDG, France  
Warrington, United Kingdom  
Milan, Italy  
Dietikon, Switzerland  
Västra Frölunda, Sweden  
Wroclaw, Poland  
Shanghai, China  
Beijing, China  
Guangdong, China  
Chongqing, China  
Shandong, China  
Hubei, China  
Singapore  
Seoul, Korea  
Bangkok, Thailand

Fax : 201-785-2482  
+31(0)30 248-1280  
+49(0)89 4357 156 99  
+33(0)1 80 11 10 82  
+44(0)1925 711143  
+39 02 39011.223  
+41(0)43 322-9809  
+46(0)31 474945  
+48(0)71 734 52 10  
+86-(0)21-5489 0005  
+86-(0)10-8522 1241  
+86-(0)20-3826 4223  
+86-(0)23-6773 4799  
+86-(0)532-8079 1873  
+86-(0)27-8544 9991  
+65 6560-9721  
+82(0)2-523-9729  
+662 361-3771

Konica Minolta Sensing Singapore Pte Ltd.  
KONICA MINOLTA OPTICS, INC.

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA OPTICS Worldwide Offices web page :

<http://konicaminolta.com/instruments/about/network>