



KONICA MINOLTA

Conforms to JIS A Class and DIN Class C

CRI Illuminance Meter

CL-70F

Easy to use !

Can take spectral measurements of flash light

Good tool for lighting planners



Rotating receptor head




Dark calibration performed without needing cap




Measurement and evaluation of the illuminance, color temperature, and color-rendering index of special illumination sources used for restaurants, museums, studios, and stages, etc.




Easy-to-read display *Display mode examples



Color rendering index



CIE1931 (CIE1964)




Spectrum




Text


Measurement and evaluation of the illuminance, color-temperature, and color-rendering index of indoor illumination sources such as LEDs, fluorescent lamps, etc.

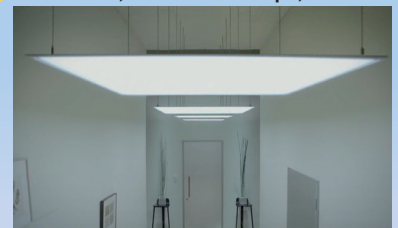

System Diagram

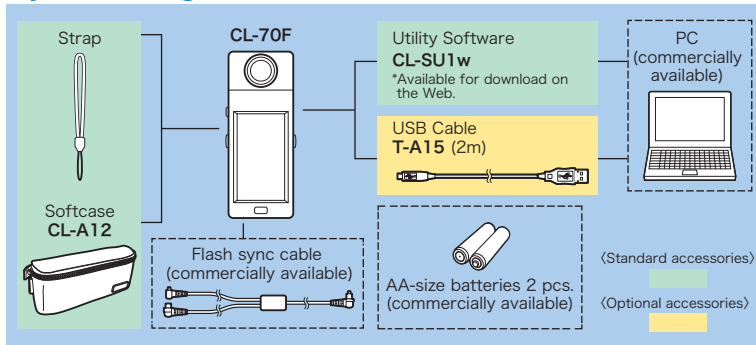

Dimensions (Units: mm)

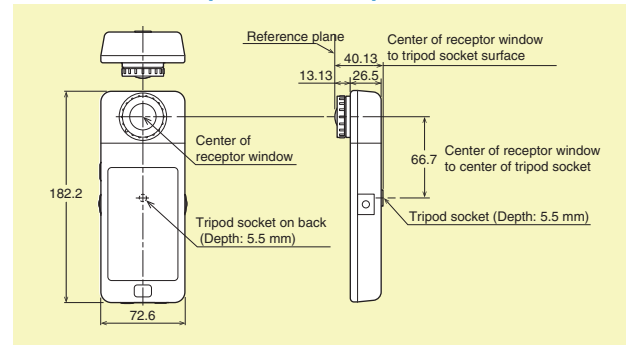

Main Specifications of CL-70F

Model	CRI Illuminance Meter CL-70F
Illuminance meter class	Conforms to requirements for Class A of JIS C1609-1 : 2006 "Illuminance meters Part1:General measuring instruments; Conforms to DIN 5032 Part 7 Class C
Sensor	CMOS linear image sensor
Spectral wavelength range	380 nm to 780 nm
Output wavelength pitch	1 nm
Measuring range	Constant light: 1 to 200,000 lx; 1,563 to 100,000 K (Chromaticity display requires 5 lx or more) Flash light: 20 to 20,500 lx·s; 2,500 to 100,000 K
Accuracy (Standard Illuminant A) (*1, 2)	E_v : $\pm 5\% \pm 1$ digit of displayed value xy : ± 0.003 (at 800 lx)
Repeatability (Standard Illuminant A) (*1)	E_v : 30 to 200,000 lx: 1%+1 digit; 1 to 30 lx: 5%+1 digit (*3) xy : 500 to 200,000 lx: 0.001 (*4) xy : 100 to 500 lx: 0.002 (*4) xy : 30 to 100 lx: 0.004 (*4) xy : 5 to 30 lx: 0.008 (*4)
Visible-region relative spectral response characteristics (f1')	Within 9%
Cosine correction characteristics (f2)	Within 6%
Temperature drift (f _t)	E_v : $\pm 5\%$ xy : ± 0.006
Humidity drift (f _h)	E_v : $\pm 3\%$ xy : ± 0.006
Power	2 AA-size batteries (Alkaline batteries or manganese dry cells); USB bus power
Response time	Constant light (Maximum): 15 sec Constant light (Minimum): 0.5 sec Flash light: 1 to 1/500 sec (in 1-step intervals) (*5)
Color indication modes	Correlated color temperature T_{cp} , Difference from blackbody Δuv , XYZ, xy , $u'v'$, Dominant wavelength λ_d , Excitation purity P_e , Spectral irradiance, E_v , CRI (Ra, Ri), Peak wavelength λ_p , exposure value
Other functions	Data memory: 999 data; Preset function; Auto power off function
Display languages	English, Japanese, Chinese (Simplified)
Interface	USB 2.0 Mini B
Operation temperature/humidity range	-10 to 40°C, relative humidity of 85% or less (at 35°C) with no condensation
Storage temperature/humidity range	-10 to 45°C, relative humidity of 85% or less (at 35°C) with no condensation
Size	73 (W) × 183 (H) × 27 (D) mm (Not including projecting buttons) D (max): 40 mm
Weight (without battery)	230 g

(*1) Measurement mode: Constant light (range L), Exposure time: AUTO

(*2) Linear for E_v

(*3) 10 times measurement (2σ) /Ave

(*4) 10 times measurement (2σ)

(*5) Shutter speed

- KONICA MINOLTA, the Konica Minolta logo and symbol mark, and "Giving Shape to ideas" are registered trademarks or trademarks of KONICA MINOLTA, INC.
- The specifications and appearance shown herein are subject to change without notice.
- Screens shown are for illustration purpose only.
- Some lamp control methods may make accurate measurements difficult. For details, please contact your nearest Konica Minolta sales office or dealers.

SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Be sure to use the specified batteries. Using improper batteries may cause a fire or electric shock.

ISO Certifications of KONICA MINOLTA, Inc., Sakai Site



ISO 9001

JQA-QMA15888
Design, development, manufacture,
manufacturing management, calibration, and
service of measuring instruments



ISO 14001

JQA-E-80027
Design, development,
manufacture, service and sales
of measuring instruments

CONTACT US - Global Network

<https://www.konicaminolta.com/instruments/network/index.html>




Utility Software (Standard accessory)

Software	OS
Windows	Windows® 10 Pro 32bit/64bit Windows® 11 Pro


• Windows® is trademarks of Microsoft Corporation in the USA and other countries.

Konica Minolta's Illuminance Measurement Trio <All conforms to JIS AA Class>


Illuminance Spectrophotometer CL-500A For industrial applications requiring high accuracy



Chroma Meter CL-200A A de facto industry standard for color-temperature measurement!



Illuminance Meter T-10A Capable of accurately measuring next-generation lamps including PWM-controlled lighting.



* Both CL-200A and CL-500A also can measure PWM-controlled light.